

Site Survey Report

802.11b/g



New York City Main Building (NYC)

3 East 43rd Street
New York, NY 10017
U.S.A.

May 06, 2010

INTERMEC TECHNOLOGIES CORPORATION

6001 36th Avenue West
Everett, WA 98203
U.S.A.

www.intermec.com

U.S. Professional Services Group 1-800-755-5505
U.S. service and technical support: 1-800-755-5505
U.S. media supplies ordering information: 1-800-227-9947
Canadian service and technical support: 1-800-668-7043
Canadian media supplies ordering information: 1-800-268-6936
Outside U.S.A. and Canada: Contact your local Intermec service supplier.

The information contained herein is proprietary and is provided solely for the benefit of the customer and those designated by the customer as necessary for the design and management of their wireless network. This document is not to be released, reproduced, or used for any other purpose without written permission of Intermec.

Product specifications referenced in this manual are subject to change without notice.

The word Intermec, the Intermec logo, Norand, ArciTech, CrossBar, Data Collection Browser, dcBrowser, Duratherm, EasyCoder, EasyLAN, Enterprise Wireless LAN, EZBuilder, Fingerprint, igistics, INCA (under license), InterDriver, Intermec Printer Network Manager, IRL, JANUS, LabelShop, Mobile Framework, MobileLAN, Nor*Ware, Pen*Key, Precision Print, PrintSet, RoutePower, TE 2000, Trakker Antares, UAP, Universal Access Point, SiteCare, Medallion Support, and Virtual Wedge are either trademarks or registered trademarks of Intermec Technologies Corporation.

Wi-Fi is a registered certification mark of the Wi-Fi Alliance.

Throughout this document, trademarked names may be used. Rather than put a trademark (® or ™) symbol in every occurrence of a trademarked name, we state that we are using the names only in an editorial fashion, and to the benefit of the trademark owner, with no intention of infringement. There are U.S. and foreign patents pending.

Report prepared by:

**Frank Wilcox
Systems Analyst II
Intermec Technologies Corporation
Ellington, CT 06029
U.S.A**

**Tel: 860.454.0171
E-Mail: frank.wilcox@intermec.com**

TABLE OF CONTENTS

WARRANTY STATEMENT	5
RESULTS SUMMARY	6
Access Points/Antennas Required For RF Coverage.....	6
Areas of RF Coverage.....	6
Cautions Regarding RF Coverage	6
Network / System Performance	6
SITE SURVEY PROCESS	7
RF Site Survey Process.....	7
RF Coverage Testing	7
Cautions Regarding RF Interference	8
INSTALLATION PROCEDURES AND RECOMMENDATIONS.....	9
Aironet Power Injector Locations.....	9
Access Point Locations.....	9
Antenna Locations	10
Network Cabling Requirements.....	10
Installation Process	11
Installation Requirements	11
RF NETWORK COMPONENTS	12
1250 Power Injector.....	12
Cisco Aironet 1140 Series Access Point.....	12
APPENDIX A	13
RF Network Equipment Parts List.....	13
Aironet Power Injector Equipment	13
APPENDIX B.....	14
Location Photographs	14
APPENDIX C.....	15
Facility Layout Diagram(s).....	24
APPENDIX D	25
Site Notes.....	27
APPENDIX E.....	28
Other Services.....	28
Installations.....	28
Medallion Support Services – Hardware Maintenance	28
Contact Intermec.....	28

Warranty Statement

Limited Warranty

-- North America --

The results contained in this Intermec Site Survey Report (“Report”) are warranted, for a period not to exceed eighteen (18) months from the date of this Report, to provide for one hundred percent (100%) RF coverage in the areas designated and marked in Appendix C of this Report – if the equipment enumerated in this Report, Appendix A, is installed, configured, and tested in specific compliance with this Report. If, immediately upon completion of installation, or during site certification, it is determined that RF coverage in accordance with Appendix C of this Report does not meet the requirements defined by Report documentation, and all other conditions of this Report have been met, Intermec will furnish additional Access Points and/or Antennas and the labor required to install the Access Points and/or Antennas to ensure specific compliance with this Report.

Any changes subsequent to the date of this Report to the facility’s structure, or parameters within the facility, may create the need for an additional Site Survey on the site for an additional fee. Changes include but are not limited to structural changes, addition or removal of storage racks, addition or removal of manufacturing equipment and any significant changes to inventory densities and the addition of any RF emitting device that could cause interference. This Limited Warranty does not warrant any level of performance of the System equipment installed.

IN NO EVENT SHALL INTERMEC OR ITS SERVICE PROVIDERS BE LIABLE FOR ANY INCIDENTAL INDIRECT, SPECIAL, CONSEQUENTIAL OR ASSOCIATIVE CONSEQUENTIAL DAMAGES WHATSOEVER, INCLUDING WITHOUT LIMITATION, DAMAGES FOR LOSS OF BUSINESS PROFITS, BUSINESS INTERRUPTION, LOSS OF BUSINESS INFORMATION, OR OTHER PECUNIARY LOSS, RESULTING FROM DEFECTIVE MATERIALS OR IMPROPERLY INSTALLED OR SERVICED SYSTEMS. THIS LIMITED WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, WHETHER EXPRESSED OR IMPLIED, WHICH MIGHT OTHERWISE ARISE WITH RESPECT TO THE SERVICES PROVIDED. NO ONE IS AUTHORIZED TO CHANGE OR ADD TO THIS LIMITED WARRANTY.

Disclaimer

All RF products perform differently based on design, type of antenna, and antenna placement within or on the unit. While Intermec takes great efforts to ensure that the site survey does meet the standards set forth, Intermec cannot be responsible for the performance of non-Intermec client devices on the wireless network because of manufacturing differences and variations in the performance of these products.

RESULTS SUMMARY

As a result of the RF Site Survey performed at New York City Main Building (NYC), on May 06, 2010, Intermec Technologies Corporation makes the following recommendations concerning the desired area(s) of Radio Frequency (RF) coverage. This report includes details of the survey process, installation procedures and recommendations, equipment list with part numbers & quantities, and facility diagrams instructions and guidelines to be used in preparation of the RF Network.

Access Points/Antennas Required For RF Coverage

Based on the results of the site survey process the total number of Access Points needed for RF coverage was determined to be 19. The total number of Antennas needed for RF coverage was determined to be 0 Directional Antennas. A complete equipment list can be found in Appendix A.

Areas of RF Coverage

A discussion and tour were conducted to determine which areas of the facility would require RF network operation. New York City Main Building (NYC) representative Jesse Mercado coordinated the orientation walk-through. The site survey was conducted in the main product handling and storage areas throughout the facility. The survey did cover the office areas.

Cautions Regarding RF Coverage

The recommendations made in this report are based upon the existing product/material densities and layouts at the New York City Main Building (NYC) facility at the time of the survey. Relatively minor changes to the product, material density and/or racking or product storage areas may invalidate the recommendations made in this report. It may then become necessary to modify the recommendations to account for the new conditions at the New York City Main Building (NYC) facility. In this event New York City Main Building (NYC) may be required, at their expense, to purchase a new Site Survey and, to either move installed equipment or to purchase additional RF equipment. New York City Main Building (NYC) would also be responsible for providing any additional electrical or network cable runs needed to accommodate the revised recommendations.

Network / System Performance

Performance is dictated by numerous factors. The overall throughput of the LAN and/or WAN segments can positively or negatively influence the performance of a wireless RF network. Factors that may degrade RF performance can include but are not limited to:

Host and/or server utilization	Network design, network segmentation
Number of clients	Ethernet utilization rates
Switches, routers, gateways	Ethernet collision rates
Application software and database response times	Non compliant Ethernet cable standards

If performance is less than expected Intermec can provide network analysis services to help resolve these issues. Please contact your Intermec Service representative for further details.

Switches must be 802.1d compliant to allow RF devices to roam across the wireless network without interruption. If a switch is not 802.1d, compliant then users may experience an interruption of their network connection as they roam.

SITE SURVEY PROCESS

RF Site Survey Process

- Orientation - An initial meeting with New York City Main Building (NYC) to determine exact areas where RF data collection is required to meet New York City Main Building (NYC)'s expectation as defined in the pre-survey sales documentation.
- RF Coverage Testing - A certified Intermec Global Services employee conducts the site survey and environmental study to establish the exact location of each network access point, the positioning of the antennas and to determine if the environment is conducive to the success of the system.
- Recap – A meeting with New York City Main Building (NYC) that reviews findings of Site Survey and offers New York City Main Building (NYC) the ability to ask any questions prior to the Intermec Global Services employee leaving New York City Main Building (NYC)'s site.
- After all data is collected and analyzed, a comprehensive Site Survey Report is generated and sent to New York City Main Building (NYC).

RF Coverage Testing

An Access Point was placed at (or near) a potential installation point to test coverage. A portable RF terminal is used to communicate with the Access Point. The portable terminal is used to determine the actual RF coverage pattern or area that is being provided by the Access Point. Depending upon the survey results of the first location additional tests may be performed. This process is repeated (as necessary) until all the areas, where RF network operation is desired, are covered. The results are then used to determine the total number of Access Points, types of antennas and exact locations that will provide coverage for New York City Main Building (NYC) facility. Upon completion of the site survey, the Intermec personnel that performed the site survey walked through the facility and pointed out suggested locations for installing the RF network equipment to New York City Main Building (NYC) representative, Jesse Mercado.

Test Standards – Cisco Aironet 802.11 g

Using the equipment specified Intermec will consider a Site Survey valid if the Signal to Noise Ratio (SNR), and the packet loss, is above the minimum appropriate level

23db SNR and a maximum packet loss of 10%

When a specific data rates are specified, the signal strength may not fall to the minimum SNR before exceeding the 10% Packet loss.

Equipment Used

During the site survey process an Access Point and one of the End Devices were used to conduct the survey.

Access Point

- Cisco Aironet 1200 Access Point with 802.11b/g radio installed.

End Device(s)

- Laptop or other Windows based device using Cisco 802.11a/b/g PC Card radio running Cisco Aironet Client Utility (ADU).

- Intermec CK30 using Intermec Site Survey Software.

Cautions Regarding RF Interference

The presence of interference signals can degrade the performance of the RF network. During the site survey, the performance of the RF equipment is observed in order to determine if any signs of RF interference are present. Common sources of interference may include but are not limited to microwave ovens, cordless telephones and other RF systems. Attempts are made during the survey process to identify and accommodate these types of devices; however devices not in operation during the survey may not be detected during the survey process. Any introduction or change in location, operation or shielding of this type of equipment may invalidate the recommendations made in this report or completely prohibit use of RF equipment. It may then become necessary to modify the recommendations to account for the new conditions at the New York City Main Building (NYC) facility. In this event New York City Main Building (NYC) may be required, at their expense, to move and/or add additional RF equipment. New York City Main Building (NYC) would also be responsible for providing any additional electrical or network cable runs needed to accommodate the revised recommendations.

INSTALLATION PROCEDURES AND RECOMMENDATIONS

Prior to the actual RF Network installation, either New York City Main Building (NYC) personnel or a contractor hired by New York City Main Building (NYC) must perform the following site preparation steps. Any personnel responsible for the RF Network installation should be aware of these requirements, and ensure that they are prepared to facilitate the mounting of the Access Points and antennas during the actual RF Network installation. Specifics on equipment to order and precise Access Point locations can be found in Appendices A-C.

Aironet Power Injector Locations

- Each Aironet Power Injector requires a 120VAC 3-conductor grounded duplex outlet located within three feet of the equipment location. This should be a computer grade dedicated circuit. The breaker should be labeled as "RF POWER BRIDGE#". The # sign represents the number of each Aironet Power Injector location. If the Aironet Power Injector is to be mounted in a network closet or rack with dedicated power then it can be plugged into the available power.
- For Access Points powered by a Power Bridge it is not necessary to have 120VAC run to those locations.
- Where necessary each Aironet Power Injector must be protected from AC power surges, spikes, under voltage and over voltage situations. New York City Main Building (NYC) may purchase and install a suitable UPS, at each Aironet Power Injector location. If required New York City Main Building (NYC) must also provide required mounting brackets, Installation requirements will vary depending on the model and size of UPS selected.

Access Point Locations

- The Access Point uses a gravity retention scheme to hold it in place and is typically mounted vertically. It should be installed with the Status Indicator LEDs clearly visible from the floor. Mounting the Access Point in this fashion will allow basic RF network troubleshooting to be performed without using lift equipment.

There are three common methods of mounting Access Points. Both New York City Main Building (NYC) personnel and the designated installer should make the determination on the best method.

1. Mount a piece of plywood or similar product approximately (3/4" x 24" x 24") vertically at the designated location prior to the scheduled installation date. It must be securely mounted before the scheduled installation date.
 2. Use beam clamps to attach the Access Point mounting bracket directly to ceiling or column structure.
 3. Install the Access Point in a sealed enclosure to protect it from the environment. The enclosure is then mounted to the building.
- Each Access Point not using Power Over Ethernet requires a 120VAC 3-conductor grounded duplex outlet located within three feet of the equipment location. This should be a computer grade dedicated circuit. The breaker should be labeled as "RF AP#". The # sign represents the number of each Access Point location.

- The Access Points requiring a 10BaseT connection to New York City Main Building (NYC)'s Ethernet LAN. Prior to Intermec's installation, an RJ45 terminated Category 5 or better cable or junction box needs to be installed by New York City Main Building (NYC) from their HUB or Switch to each of the Access Point locations. New York City Main Building (NYC) must ensure that the installer certifies these network connections.
- New York City Main Building (NYC) will need to provide static IP addresses and default gateway router IP address if not using DHCP for each Access Point. New York City Main Building (NYC) must provide Sub-net mask, host IP address or controller IP address, if required, and provide a temporary IP address for the installer's notebook computer.
- To provide additional RF Network security, New York City Main Building (NYC) may provide site-specific setting for these Access Point configuration options: LAN Domain, Network Name, and Security Settings. For additional information consult the Access Point Users Manual or your sales representative.
- Where necessary each Access Point must be protected from AC power surges, spikes, under voltage and over voltage situations. New York City Main Building (NYC) may purchase and install a suitable UPS, at each Access Point location. As an alternative it is acceptable to install a centrally located UPS to drive these remote outlets.

Antenna Locations

- If Directional Antennas are required, then a piece of plywood, approximately ¾"x5"x5" square, may be required at each Directional Antenna location before the scheduled install date. Directional Antennas must be installed such that they have a clear line of sight towards the area where they will be providing RF coverage.
- Omni-Directional Antennas do not typically require any special mounting surface preparation. Omni-Directional Antenna(s) must be installed vertically (typically pointed towards the floor) with a clear line of site around the antenna. Any obstructions near the antenna may degrade the performance of the antenna and cause poor RF network operation.
- Any holes in walls for cable, special brackets or antenna masts must be completed.

Network Cabling Requirements

- The Ethernet cable that attaches the Access Point to the Ethernet topology must be installed by New York City Main Building (NYC) or contractor hired by New York City Main Building (NYC). The cable must be Category 5 or higher and the installer must certify the installed cable runs.
- All Network cables must be terminated with a proper connector or outlet junction box.
- All network infrastructures installed for use with the RF network must comply with accepted industry standards. Any deviation from these standards may cause less than optimum performance of the network.
- Any Patch Cables required are the responsibility of New York City Main Building (NYC) to supply at time of installation.

Installation Process

- **Site Review:** During this walk through, the installer will visually inspect the installed AC outlets, Ethernet cable runs and other pre-installation requirements.
- **Inventory of Equipment:** The installer will unpack and conduct an inventory of the equipment to ensure all parts are accounted for.
- **Access Point Configuration.** The installer will configure the Access Points, and establish a network connection. The installer will use New York City Main Building (NYC)'s previously assigned IP addresses.
- **Access Point Installation.** Depending on complexity, this process can consume up to 90 minutes per Access Point.

Installation Requirements

- The installer will require a work area with a desk, bench or table with at least two power outlets to configure the Access Points.
- It is the responsibility of New York City Main Building (NYC) to provide any lift equipment necessary to safely access equipment installation locations
- The Intermec installer may require the assistance of New York City Main Building (NYC)'s Maintenance Department. The maintenance employee will need basic hand tools, power tools, tie wraps, beam clamps and fasteners, etc.
- The Intermec installer will install the Access Points, antennas, coax cable and lightning suppressor (as required) with the assistance of New York City Main Building (NYC)'s personnel. If lightning suppression is used, New York City Main Building (NYC) must have a licensed electrician attach an appropriate ground to the suppressor bracket.

RF Network Components

1250 Power Injector



Cisco Aironet 1140 Series Access Point



<http://www.cisco.com/en/US/products/ps10092/index.html>

APPENDIX A

RF Network Equipment Parts List

Quantity	Part #	Product Description
19	AIR-LAP1142N-A-K9	Cisco Aironet 1142N 802.11a/g/n-d2.0

Aironet Power Injector Equipment

Quantity	Part #	Product Description
19	AIR-PWRINJ4	Power Injector for 1100/1200 Series

Please refer to Appendix E Site Notes for additional information

Cisco Access Point Controllers and any related software requirements are not included in this document. The sales team should provide the recommendations for the controllers in their proposal.

Any Patch Cables required are the responsibility of New York City Main Building (NYC) to supply at time of installation.

APPENDIX B

Location Photographs



- **AP1:** AIR-LAP1142N-A-K9
- **Location:** NYC Basement outside book store
- **Notes:** mount access point to ceiling grid.



- **AP2:** AIR-LAP1142N-A-K9
- **Location:** NYC Basement in TV area
- **Notes:** mount access point to ceiling grid.



- **AP3:** AIR-LAP1142N-A-K9
- **Location:** NYC mezzanine floor in hallway near server room
- **Notes:** mount access point to ceiling grid.



- **AP4:** AIR-LAP1142N-A-K9
- **Location:** NYC mezzanine floor in hallway near room # 8
- **Notes:** mount access point to ceiling grid.



- **AP5:** AIR-LAP1142N-A-K9
- **Location:** NYC 2nd floor in hallway outside class room # 204
- **Notes:** mount access point to ceiling grid.



- **AP6:** AIR-LAP1142N-A-K9
- **Location:** NYC 2nd floor in hallway outside room # 202D
- **Notes:** mount access point to ceiling grid.



- **AP7:** AIR-LAP1142N-A-K9
- **Location:** NYC 3rd floor in hallway outside class room # 303
- **Notes:** mount access point to ceiling grid.



- **AP8:** AIR-LAP1142N-A-K9
- **Location:** NYC 3rd floor in hallway outside class room # 302
- **Notes:** mount access point to ceiling grid.



- **AP9:** AIR-LAP1142N-A-K9
- **Location:** NYC 3rd floor in hallway outside class room # 304
- **Notes:** mount access point to ceiling grid.



- **AP10:** AIR-LAP1142N-A-K9
- **Location:** NYC 4th floor in hallway outside room # 406
- **Notes:** mount access point to ceiling grid.



- **AP11:** AIR-LAP1142N-A-K9
- **Location:** NYC 4th floor in hallway outside class room # 401
- **Notes:** mount access point to ceiling grid.



- **AP12:** AIR-LAP1142N-A-K9
- **Location:** NYC 4th floor in hallway outside class room # 402
- **Notes:** mount access point to ceiling grid.



- **AP13:** AIR-LAP1142N-A-K9
- **Location:** NYC 5th floor in hallway outside class room # 504
- **Notes:** mount access point to ceiling grid.



- **AP14:** AIR-LAP1142N-A-K9
- **Location:** NYC 5th floor in hallway outside advisement room 501
- **Notes:** mount access point to ceiling grid.



- **AP15:** AIR-LAP1142N-A-K9
- **Location:** NYC 5th floor in hallway outside class room # 503
- **Notes:** mount access point to ceiling grid.



- **AP16:** AIR-LAP1142N-A-K9
- **Location:** NYC 5th floor in hallway outside room # 601
- **Notes:** mount access point to ceiling grid.



- **AP17:** AIR-LAP1142N-A-K9
- **Location:** NYC 6th floor in hallway outside class room # 602
- **Notes:** mount access point to ceiling grid.




- **AP18:** AIR-LAP1142N-A-K9
- **Location:** NYC 7th floor in library near entrance of President office and library
- **Notes:** mount access point to ceiling grid.




- **AP19:** AIR-LAP1142N-A-K9
- **Location:** NYC 7th floor in library near shelves for books 300-600
- **Notes:** mount access point to ceiling grid.

APPENDIX C

Facility Layout Diagram(s)



NYC-3 East 43rd St.

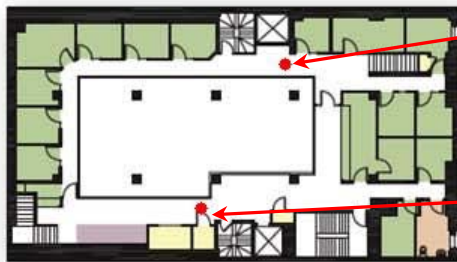


Location #4

Location #3

M

MEZZANINE FLOOR PLAN

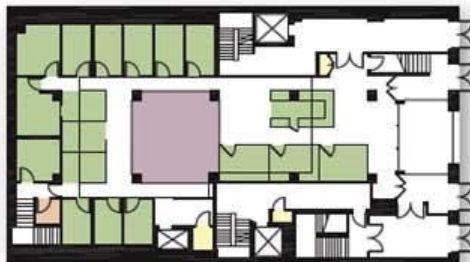

1

FIRST FLOOR PLAN



Location #1


Location #2

B

BASEMENT FLOOR PLAN

LEGEND

- ADMINISTRATION
- RECREATION/ ASSEMBLY
- SUPPORT
- LAVATORY
- CIRCULATION/ UNASSIGNED



NYC-3 East 43rd St.




Location #10

Location #11

Location #12

FOURTH FLOOR PLAN

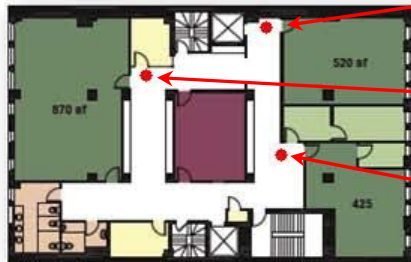

Location #7

Location #8

Location #9

THIRD FLOOR PLAN



Location #5

Location #6


SECOND FLOOR PLAN

LEGEND


	ADMINISTRATION
	ACADEMIC/ FACULTY
	CLASSROOM/ LAB
	RECREATION/ ASSEMBLY
	SUPPORT
	LAVATORY
	CIRCULATION/ UNASSIGNED

Plan Diagrams

Assessment of Facilities 2-7



NYC-3 East 43rd St.

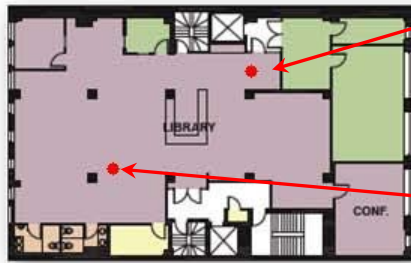

Location #19

Location #18


SEVENTH FLOOR PLAN



Location #16

Location #17

SIXTH FLOOR PLAN

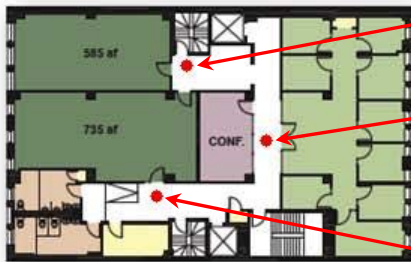

Location #13

Location #14

Location #15

FIFTH FLOOR PLAN

LEGEND

	ADMINISTRATION
	ACADEMIC/ FACULTY
	CLASSROOM/ LAB
	RECREATION/ ASSEMBLY
	SUPPORT
	LAVATORY
	CIRCULATION/ UNASSIGNED

APPENDIX D

Site Notes:

All installed Access Point much be removed for this System to work correctly

Appendix E

Other Services

In addition to Site Surveys, Intermec Professional Services provides the services and products listed below. To request additional information or to schedule any of these services please contact your sales representative or the Intermec Professional Services Group.

Installations

Wireless Backbone Installation

- Install and configure all network controllers per the site survey document. Configure and test all access points followed by installing them with antennas, cables, and associated mounting hardware, per the Site Survey.
- Install and test all components as specified by the Site Survey document.
- Test network connectivity to every Access Point and network controller.
- Test the facility for RF coverage per Site Survey.

End Device Installation

Install and configure End Device units, including handheld terminals, fixed mount terminals, printers, and accessories. For VMU devices the mounting brackets or power supplies must already be installed for Intermec to configure and attach the unit.

Site Certification

For installations that want to be sure they are configured and operating at maximum efficiency.

- Verify that basic Access Point configurations are correct.
- Conduct a walkthrough to determine the Access Points and antennas are providing the necessary signal strength and data rate to provide requested levels of coverage.
- Verify that all Access Points are communicating properly with the wired network.
- Check coverage areas for possible interference.
- Verify the basic configuration of one of each type of end devices.

Medallion Support Services – Hardware Maintenance

Medallion On-Site Service

On-Site Service is designed for Intermec customers with mission-critical applications who want to have personalized, on-site administration and support. The program offers three response time options (four-hour, next-day, and two-day) from the time of your call.

Medallion Silver Replacement Service

Silver Replacement Service provides overnight delivery, warehousing, and inventory management services to deliver customer-owned replacement units to your facility within one day of your call.

Medallion Depot Service

Depot Support Service provides a choice of two-day and five-day guaranteed repair response times from the unit's arrival at an Intermec Repair Center.

Contact Intermec

To learn more about Intermec's Services, please call 1-800-934-3163 and mention Medallion Services or go to the Intermec Services Web Site:

<http://www.intermec.com/eprise/main/GSS/Service/Content/ServiceHome>

Intermec Technologies Corporation
Corporate Headquarters
6001 36th Avenue West
Everett, Washington 98203



Tel 425.348.2600

Service 800.755.5505

Fax 425.395.9551

www.intermec.com

Global Services - Site Survey Report version. Jt



670031-001

